


P1

P2

PIN OUT

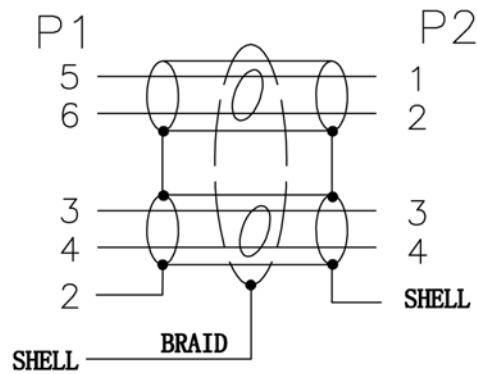

REQUIREMENTS:

1:100% short and open testing.

2:Test conditions

DC300V /10MS

Insulation resistance 10MΩ(Min)

Conduction resistance 5Ω(Max)

④	MOLDED	BLACK 45P PVC	0.028	KG
③	CONNECTOR	1394 4PIN MALE	1	PCS
②	CONNECTOR	1394 6PIN MALE	1	PCS
①	CABLE	UL20379 (30AWG*2C+D+AL)*2C+MYLAR+AL+B OD:4.5MM,BLACK JACKET	4.5	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by	Checked by	Approved by - date	File name	Date	Scale	
		MARCH 4.2012	394 6P/M-4P/M L=4.5M	MARCH 4.2012	FREE	
			26-0801			
			26-0801	Edition 1	Sheet 1/2	